

Diesel Engine Driven Generator

DG25MK-400


shindaiwa®

CONTROL PANEL



1. Hour Meter
2. 400/440V Output Lamp
3. Pilot Lamp
4. Voltmeter
5. Ammeter
6. Frequency Meter
7. Warning Indicators
8. Water Temperature Gauge
9. Fuel Gauge
10. Voltage Regulator
11. Over Load Precaution Lamp
12. Preheat Lamp
13. Starter Switch
14. Throttle Switch
15. Earth Leakage Relay
16. Circuit Breaker

AC Output Panel

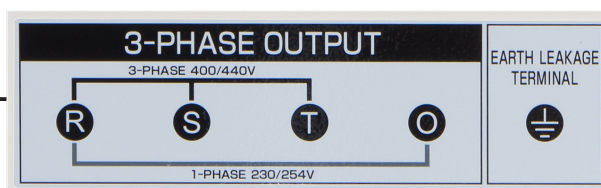

17. 3-Phase Output Terminal
18. Earth Leakage Terminal
19. Bonnet Grounding Terminal

FEATURES

Overload precaution lamp

The warning lamp begins to flash when the output current exceeds 80% of the rated capacity, alerting the user to potential overload.

Low noise

Minimal operating noise with a top-class low noise level. Ideal for communication and reducing worker fatigue at worksites.

High-capacity water separator

Designed with a capacity five times larger than conventional models for the Japanese market. The warning lamp activates when water accumulation exceeds 110ml.

Robust alternator

In-house designed and manufactured brushless alternator ensures reliable performance, even in sandy, dusty, and extreme heat condition.

Reliable engine

Powered by
Kubota

Kubota V2403 one of the most hardworking, efficient and cleanest running diesel engines on the market.

Optional large fuel filter

The internal layout provides ample space for installing a large-capacity fuel filter, enhancing filtration efficiency and supporting extended operation in demanding conditions.