

Diesel Engine Driven Generator

DG25MK-400M/RV



shindaiwa®

CONTROL PANEL



1. Hour Meter
2. Voltage Regulator
3. Power Switch
4. Earth Leakage Relay
5. Frequency Selector Switch (inside)
6. Controller
7. Stop Mode Button
8. Manual Mode Button
9. Auto Mode Button
10. Lamp Test / Air Bleeding Button
11. Start Button
12. Circuit Breaker

AC Output Panel

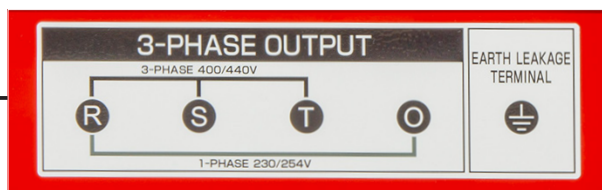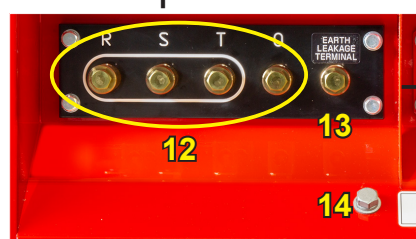

12. 3-Phase Output Terminal
13. Earth Leakage Terminal
14. Bonnet Grounding Terminal

FEATURES

Overload precaution indicator

A warning appears on the operation display when the output current exceeds 80% of the rated capacity.

Low noise

Minimal operating noise with a top-class low noise level. Ideal for communication and reducing worker fatigue at worksites.

High-capacity water separator

Designed with a capacity five times larger than conventional models for the Japanese market. "Water in Fuel" appear on the operation display when water accumulation exceeds 110ml.

Optional large fuel filter

The internal layout provides ample space for installing a large-capacity fuel filter, enhancing filtration efficiency and supporting extended operation in demanding conditions.

Robust alternator

In-house designed and manufactured brushless alternator ensures reliable performance, even in sandy, dusty, and extreme heat condition.

Reliable engine

Powered by
Kubota

Kubota V2403 one of the most hardworking, efficient and cleanest running diesel engines on the market.

Trailer-ready frame design

Reinforced joints and anti-vibration stoppers ensure stability and smoother transport when mounted on a trailer.